



| CURB<br>SIZE | DIM. | DIM. |
|--------------|------|------|
|              | A    | B    |
| 9" X 16"     | 16"  | 4"   |
| 9" X 18"     | 18"  | 6"   |
| 9" X 20"     | 20"  | 8"   |
| 9" X 22"     | 22"  | 10"  |

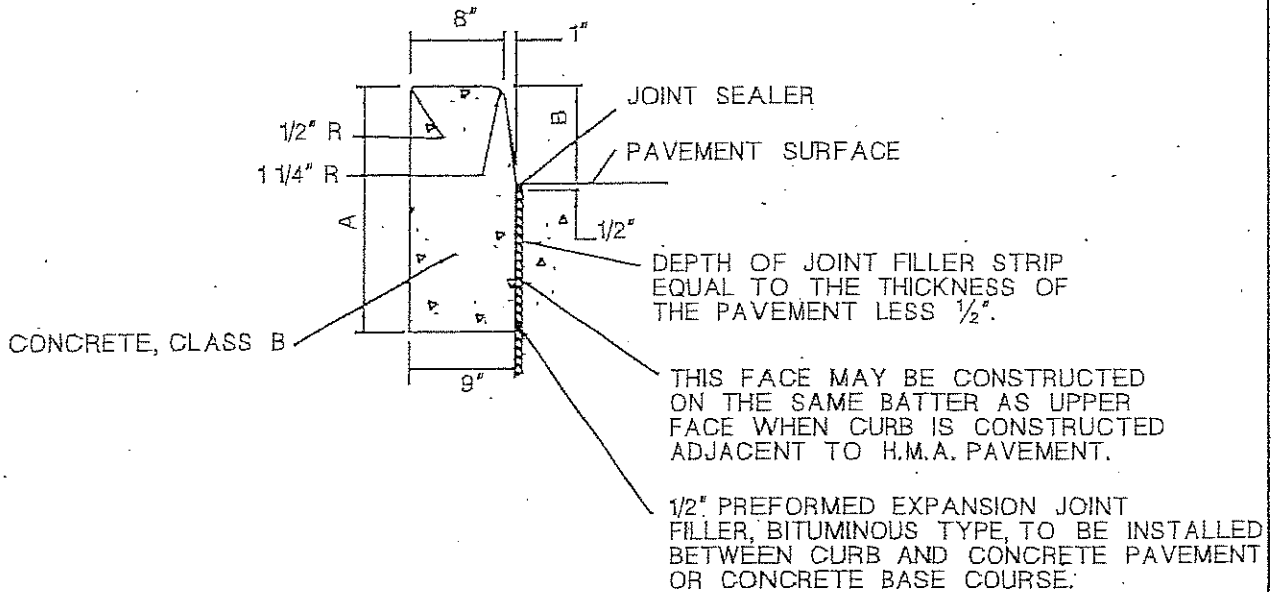


TRANSVERSE JOINTS 1/2" WIDE SHALL BE INSTALLED IN THE CURB 20' APART AND SHALL BE FILLED WITH PREFORMED BITUMINOUS IMPREGNATED FIBER JOINT FILLER RECESSED 1/4" IN FROM FRONT FACE AND TOP OF CURB. EXPANSION JOINTS THROUGH AND ADJACENT TO THE CURB SHALL BE INCLUDED IN THE UNIT PRICE BID FOR THE CURB.

## CONCRETE VERTICAL CURB



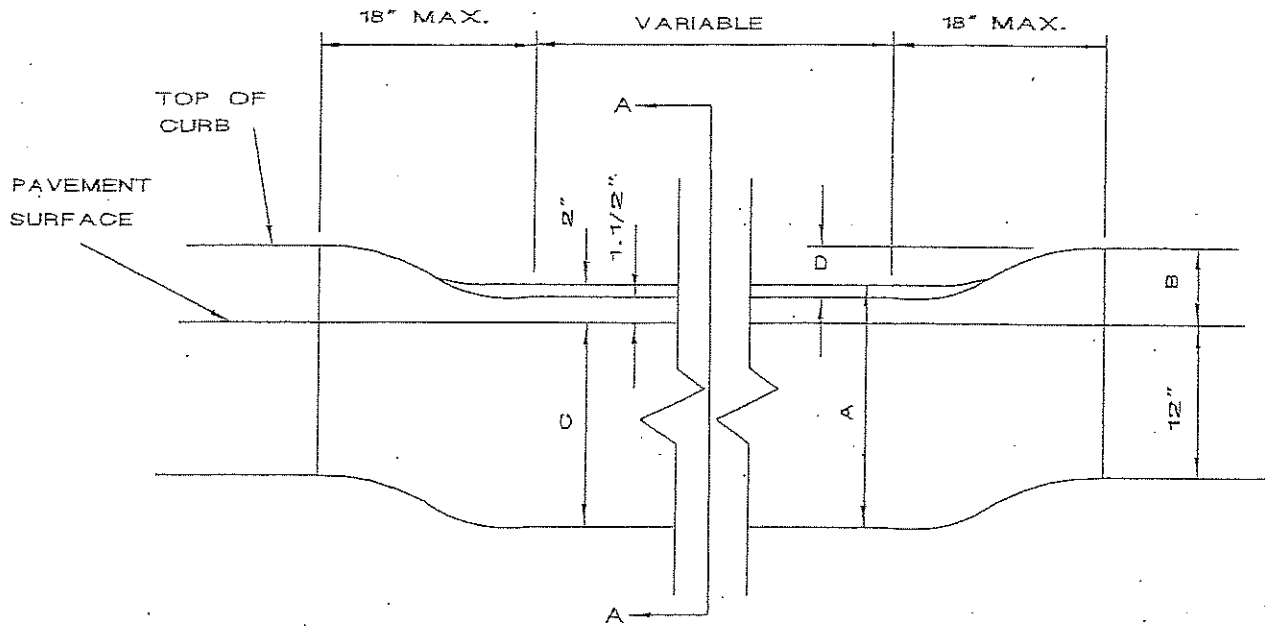


| CURB SIZE | DIM. A | DIM. B | DIM. C | DIM. D |
|-----------|--------|--------|--------|--------|
| 9" x 16"  | 16"    | 4"     | 14"    | 2.1/2" |
| 9" x 18"  | 18"    | 6"     | 16"    | 4.1/2" |
| 9" x 20"  | 20"    | 8"     | 18"    | 6.1/2" |
| 9" x 22"  | 22"    | 10"    | 20"    | 8.1/2" |

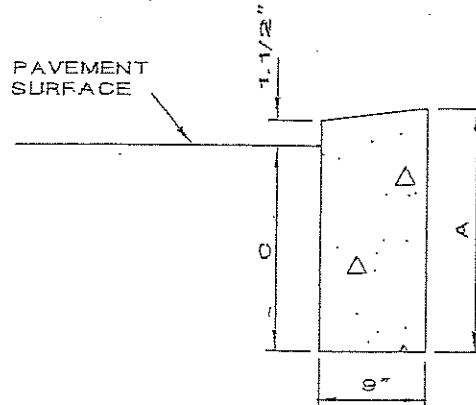


SECTION A-A

## METHOD OF DEPRESSING CURB AT DRIVEWAYS

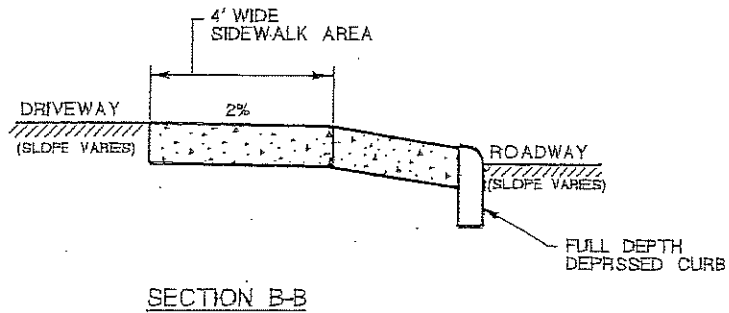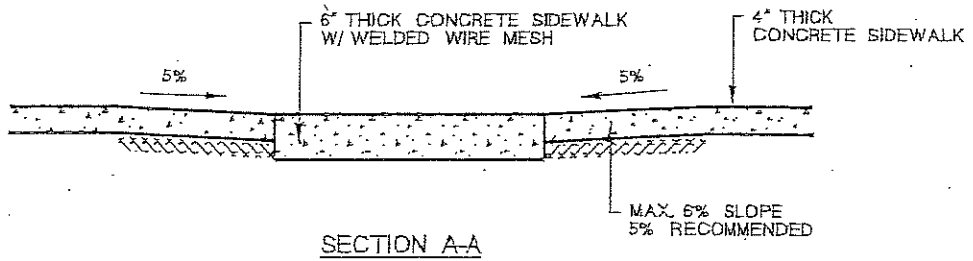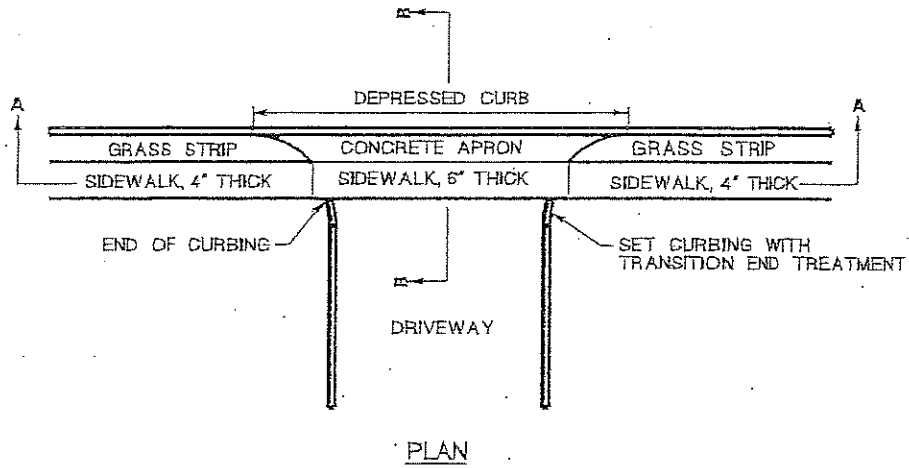


## CONCRETE APRON WITH SIDEWALK (COMMERCIAL PROPERTIES)


NOT TO SCALE

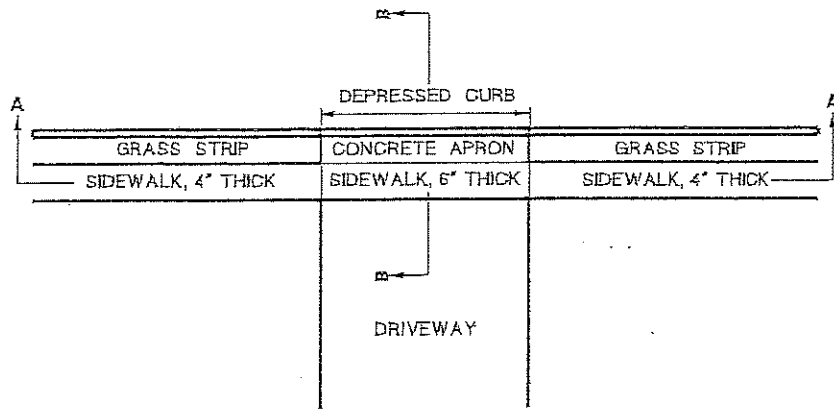

PLAN

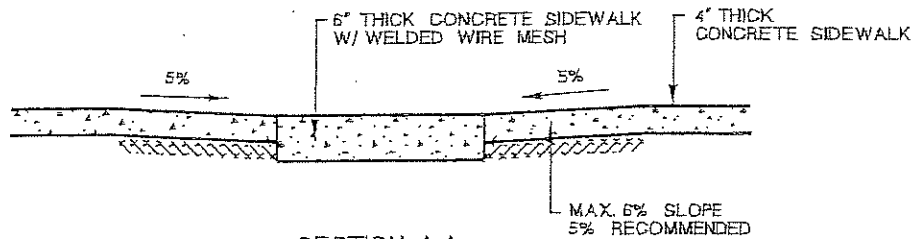


SECTION A-A

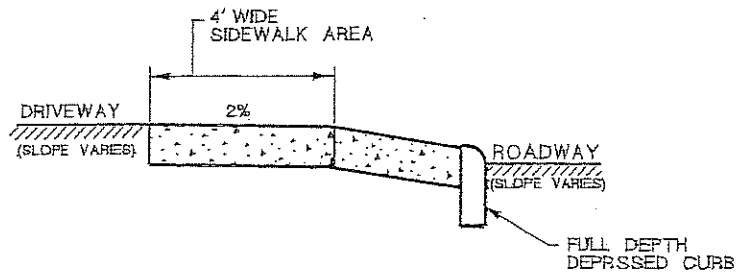

SECTION B-B

## CONCRETE APRON WITH SIDEWALK (RESIDENTIAL PROPERTIES)

NOT TO SCALE

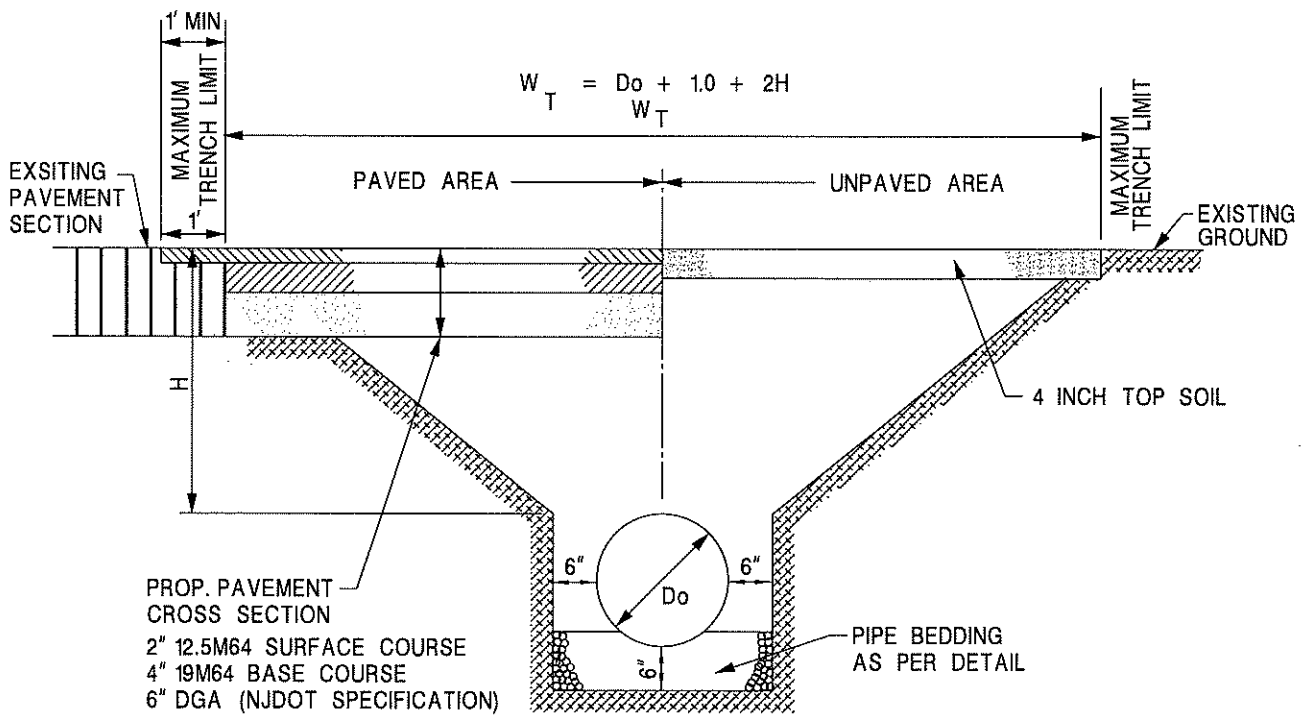

**NOTE:**

1. TEMPORARY PAVEMENT SECTION REPAIR - 6" DGA, W/6" BASE COURSE 19M64 FOR 30 DAYS NOT TO EXCEED 60 DAYS.
2. FINAL REPAIR - MILL 2", PAVE 2" SURFACE COURSE 12.5M64, FINAL REPAIR WIDTH SHALL BE  $W_T + 2$  FEET AFTER MINIMUM 30 DAY SETTLEMENT PERIOD.
3. FOR CROSS TRENCHES ON ROADS NEWLY PAVED 3 YEARS OR LESS MINIMUM FINAL TRENCH REPAIR WIDTH SHALL BE 25 FEET.

## TRENCH REPAIR PAYMENT LIMITS